


CASA

SHOWER SCREEN

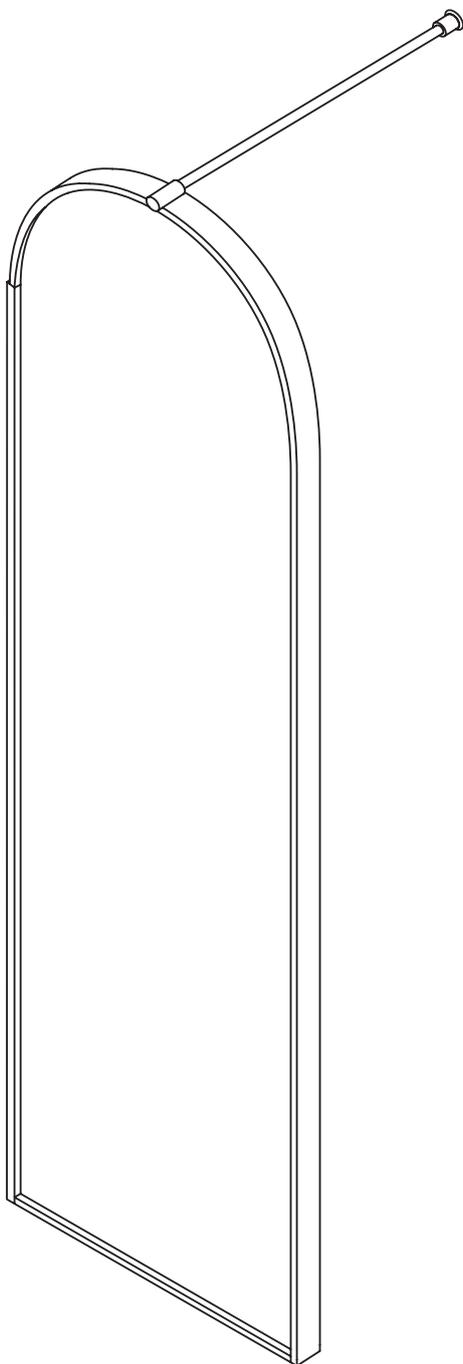

EN INSTALLATION AND CARE GUIDE

Please retain for future reference

LUSO

INTRODUCTION


Thank you for purchasing this Casa Shower Screen.

Please read this guide carefully before installing, using and cleaning this product, and retain it for future reference.

If you have any queries in relation to this product or guide, please contact our Customer Service team on 020 3370 4057.

PRODUCT KIT




- | | | | |
|----------|------------------|----------|----------------------|
| A | Screws (x3) | G | 19mm Bracing Tube |
| B | Wall Post | H | Bracing Tube Bracket |
| C | Wall Screws (x4) | I | Framed Glass |
| D | Wall Plugs (x4) | | |
| E | Screw Caps (x3) | | |
| F | Clamp | | |

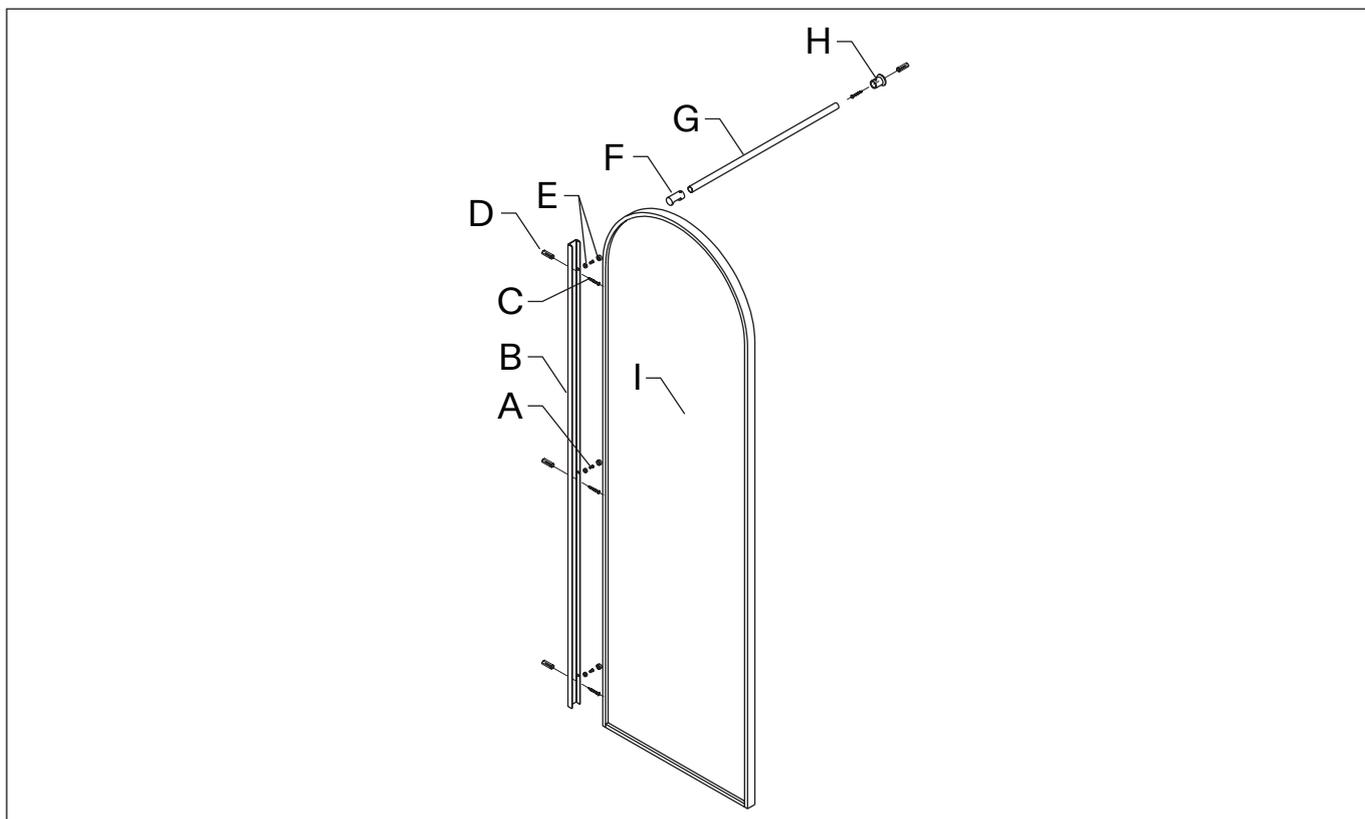

INSTALLATION STEPS

Before installation, please check the installation drawings carefully. Please also note that the length of the bracing tube is 1000mm, however it can be cut to a shorter length if required.

- 1** Using a spirit level, place the wall post vertically against the installation wall, and mark the position of the required installation holes. Next, drill the holes using an 8mm drill bit, gently tap the wall plugs into the holes, and screw the wall post tightly into place using the provided screws before adding the decorative screw caps.
- 2** Carefully sit the glass into the wall post, then use the provided screws to tighten the glass into position from the inner side (as shown in Figure 2).
- 3** Remove the bracket and clamp from the bracing tube, fix the clamp onto the screen, and if needed, trim the tube to the required length (see Figure 4 for guidance).
- 4** Using a spirit level, mark the required position of the bracing tube bracket on the adjoining wall, secure the bracket to the wall using the provided fixings, then unscrew the bracket from its mounted base.
- 5** Install the bracket onto the bracing tube, ensure the clamp is tightly fixed to the screen frame, then position the bracing tube within the clamp and the mounted bracket base. Next, fix the tube into position using the provided screws and allen key.
- 6** Finally, reinforce the wall post and bottom track of the screen with clear silicone. Avoid using the screen for the first 24 hours after installation to ensure that the silicone is completely dry before it comes into contact with water.

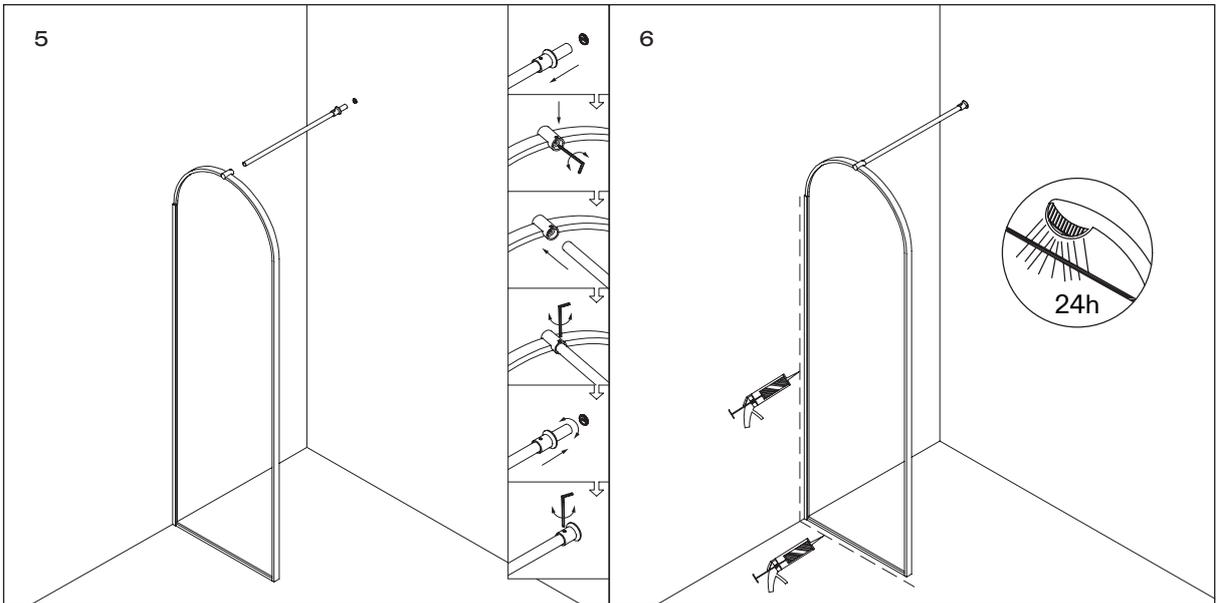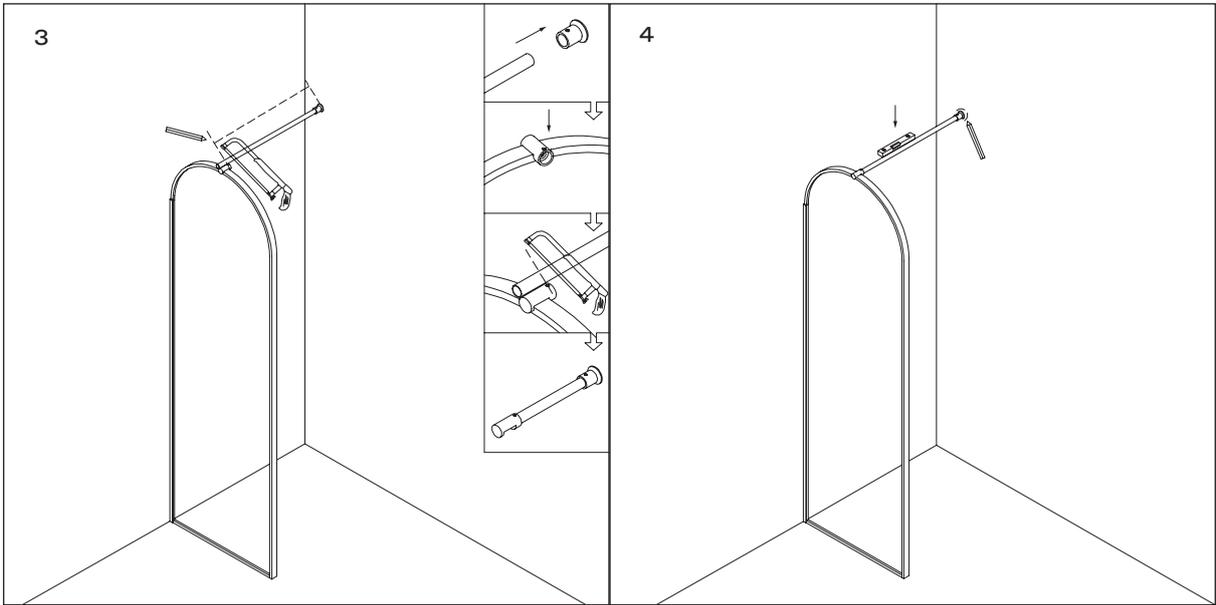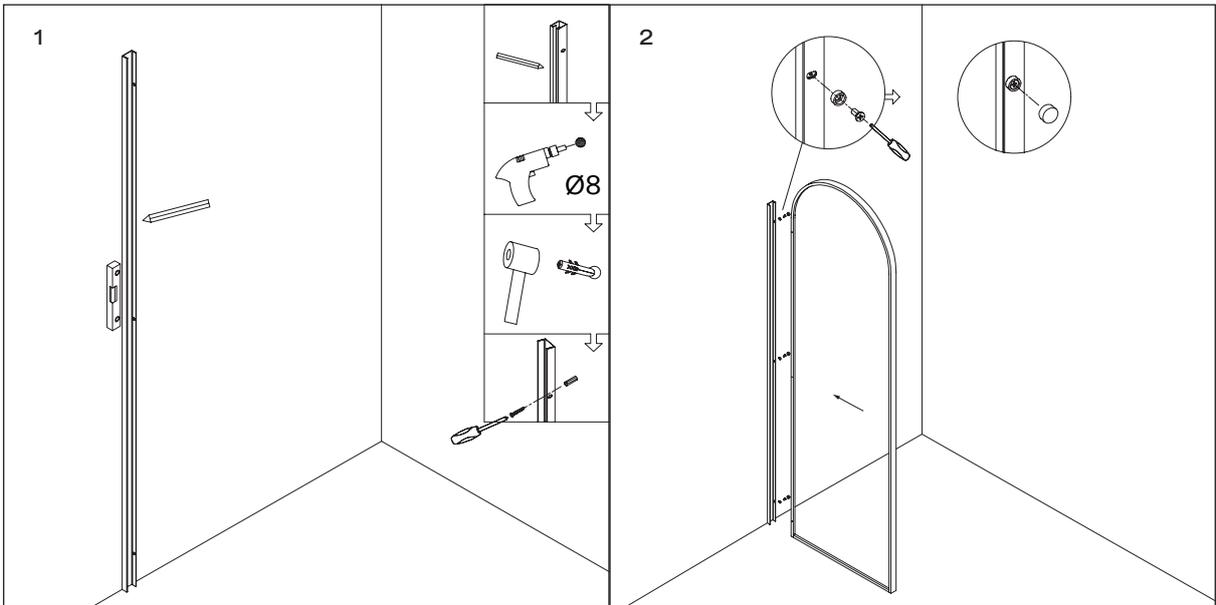

CARE INSTRUCTIONS

To clean and maintain the flawless finish of this product, please follow the below instructions. Improper maintenance will void your product guarantee.

- ✓ Clean the frame with a damp cloth.
- ✓ Clean the screen with a glass cleanser.

- ✗ Do not use acidic cleansers.
- ✗ Do not use abrasive cleansers or cloths.

Go to Lusso.com to activate your guarantee.

LUSO

Customer Care: 020 3370 4057

International: +44 20 3370 4057