


LINEAR

TILEABLE WETROOM WASTE KIT

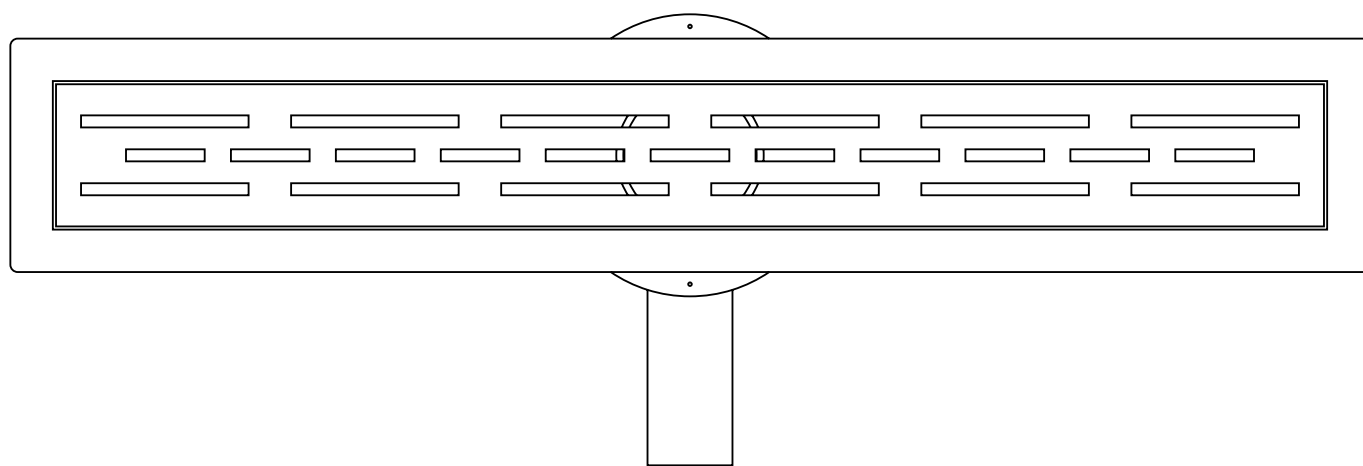

EN INSTALLATION AND CARE GUIDE

Please retain for future reference

LUSO

INTRODUCTION

Thank you for purchasing this Linear Tileable Wetroom Waste Kit.


Please read this guide carefully before installing, using and cleaning this product, and retain it for future reference.

If you have any queries in relation to this product or guide, please contact our Customer Service team on 020 3370 4057.

PRODUCT KIT

Please ensure all components are present before installation:


- | | | | |
|----------|-------------|----------|----------|
| A | Waste Kit | D | Strainer |
| B | Hook | E | Basket |
| C | Rubber Ring | F | Membrane |



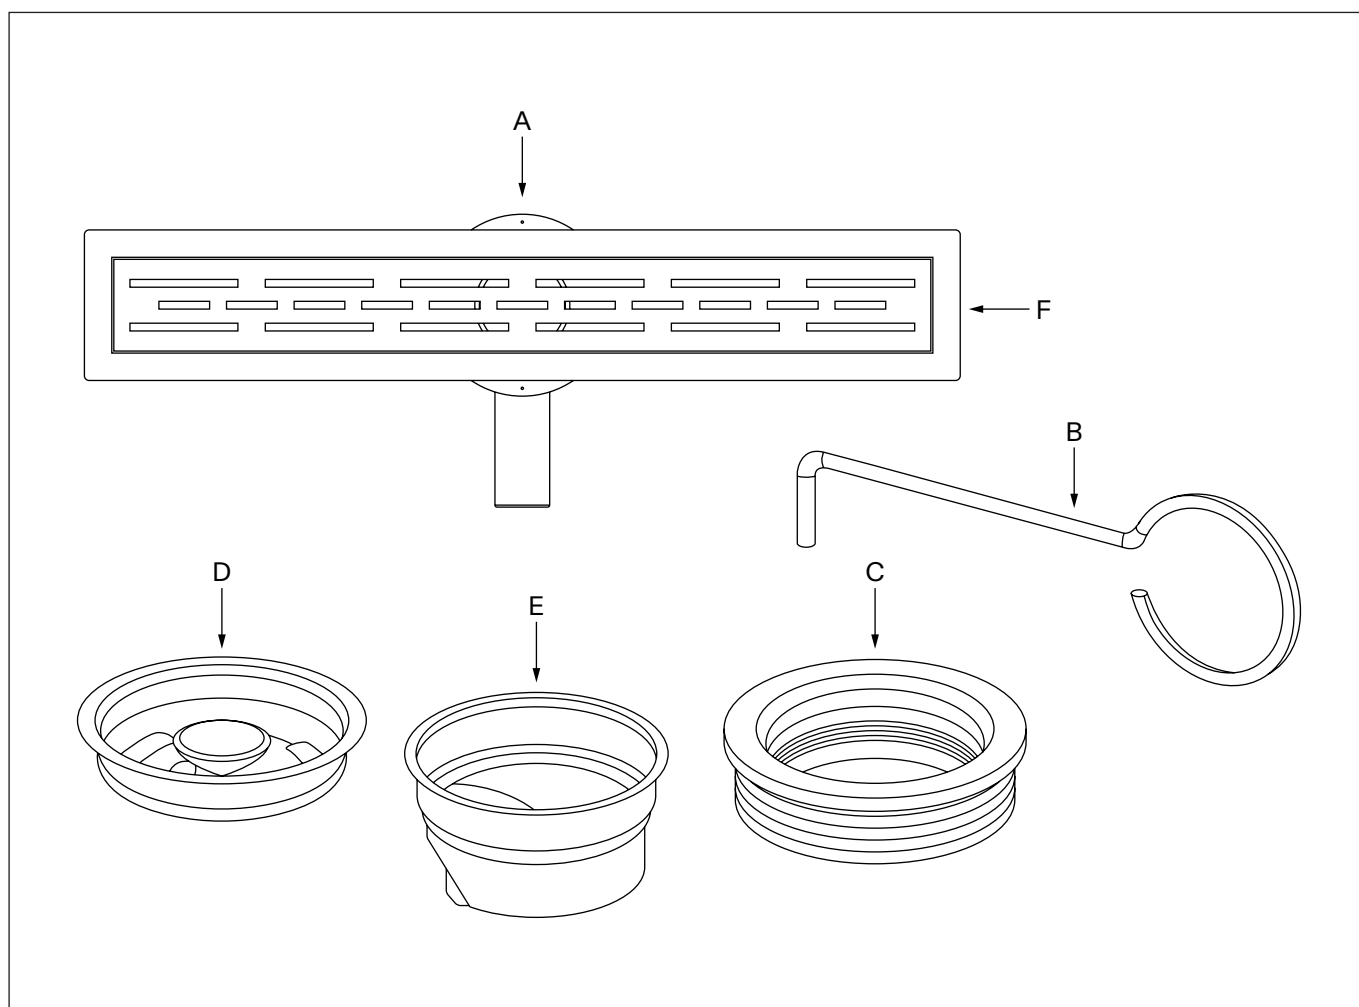


INSTALLATION STEPS

To ensure a flawless fit and finish, this product must be installed by a fully qualified professional.

- 1 Using the hook provided, carefully remove the cover plate. Remove the protective plastic supports from each corner and set them aside, then position the membrane over the base.
- 2 Connect the waste outlet to the mains waste pipe. Before completing the installation, thoroughly test the waste fitting for any leaks. **Please note:** The plastic outlet base is fully rotatable (360°) and can be adjusted to the required direction.
- 3 Reposition the rubber sealing ring inside the plastic base.
- 4 Refit the bottom plate securely into the waste base.
- 5 Replace the inserts into the waste bottom plate.
- 6 For tiled insert installations, turn the plate over and cut/install the tile as required. Check the tile thickness carefully and adjust the stainless steel waste cover to the appropriate height. Ensure the waste fitting is perfectly level, as uneven installation may result in water pooling around the drain.
- 7 If a tiled insert is not required, refit the plastic cover supports onto the top plate and place it back into the waste fitting. When laying tiles or flooring, ensure the gradient slopes correctly towards the waste outlet. An insufficient fall may lead to water pooling and reduced drainage performance.

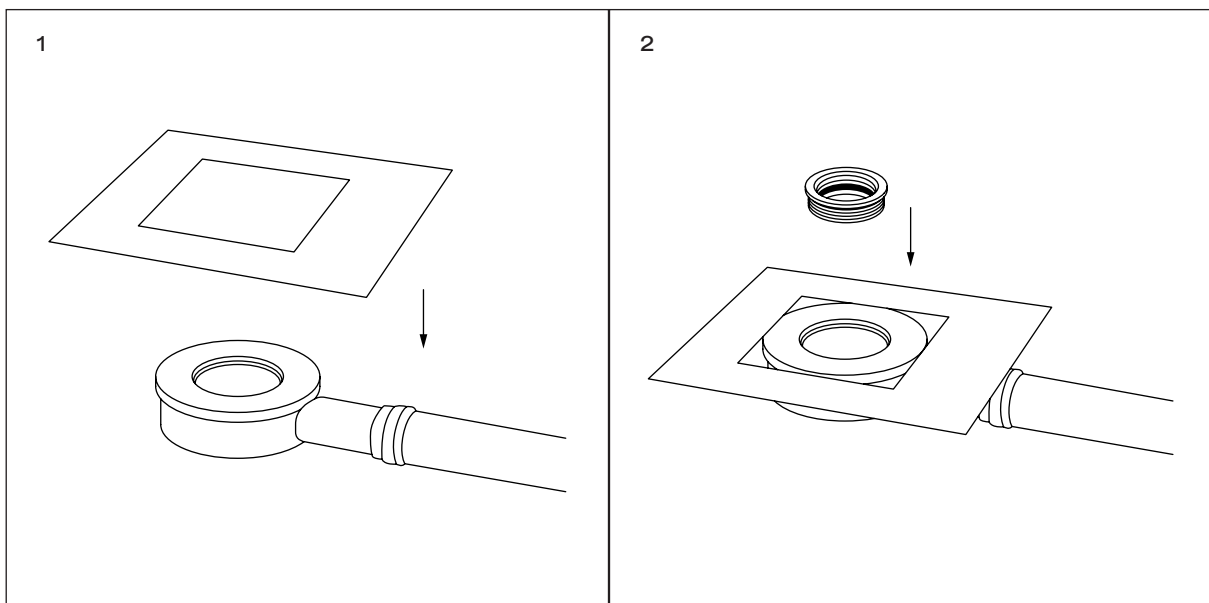

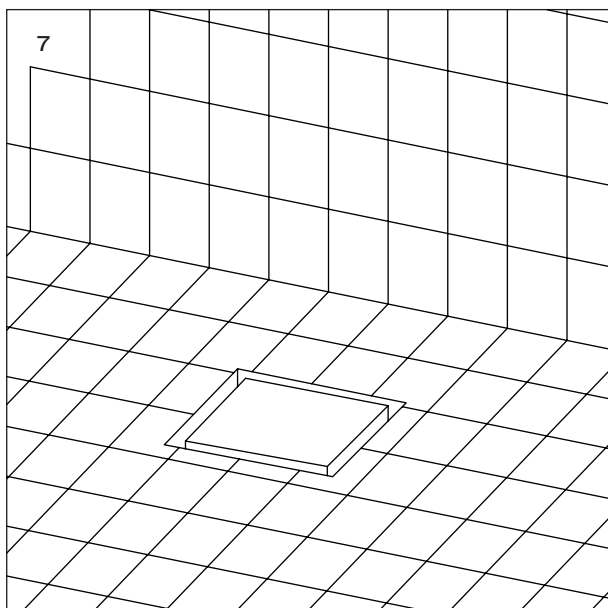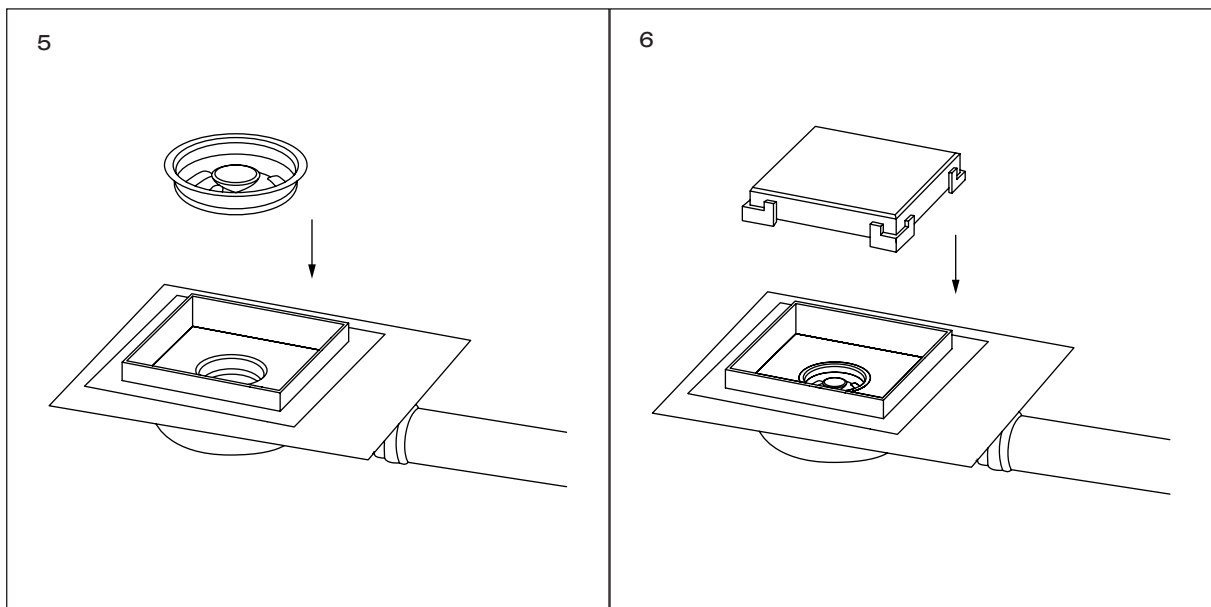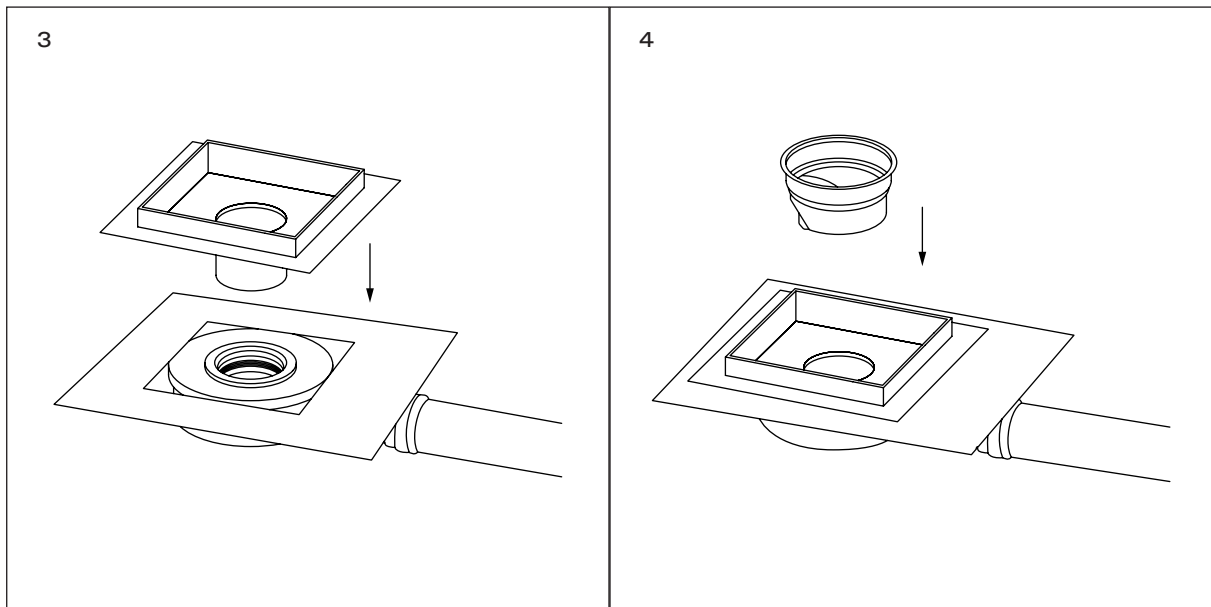

MAINTENANCE INFORMATION

The trap is designed to provide a flow rate of up to 50 litres per minute. Please note that drainage performance may be significantly reduced if there is insufficient fall in the waste pipe.

If silicone sealant is required during installation, only a neutral cure sealant should be used. Acetoxym sealants are not suitable for this product.

Regular maintenance is essential to maintain optimum drainage performance and preserve the product finish.

Please note: Any damage resulting from improper maintenance or the use of unsuitable cleaning products remains the responsibility of the consumer.

CARE INSTRUCTIONS

To clean and maintain the flawless finish of this product, please follow the below instructions. Improper maintenance will void your product guarantee.

- ✓ Rinse the surface of the product with clean water.
- ✓ Dry with a soft cloth.
- ✓ Remove surface marks using a neutral cleanser without coarse grained powder.

- ✗ Do not use acidic cleansers.
- ✗ Do not use abrasive cleansers or cloths.

For full guarantee details and to activate your product warranty, please visit Lusso.com.

LUSO

Customer Care: 020 3370 4057

International: +44 20 3370 4057