


LUSSO

LUSSO LUXE SHOWER SET

LUS100

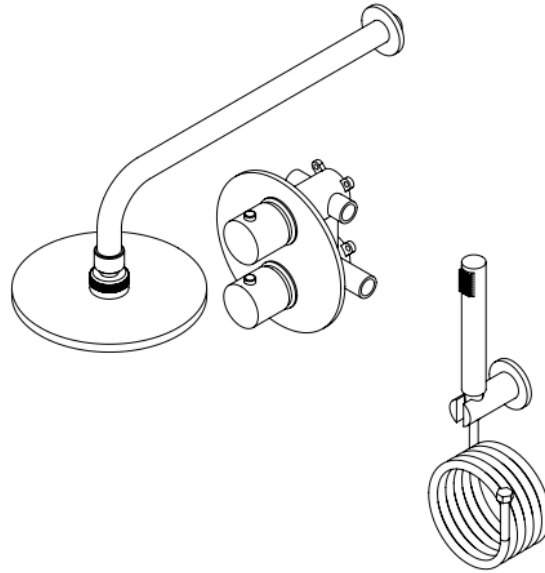

CONSTRUCTION:	Lead-Free Brass
MOUNT TYPE:	Wall Mounted
CARTRIDGE:	Thermostatic
SHOWER VALVE INLET:	G 3/4"
SHOWER VALVE OUTLET:	G 1/2"
WORKING PRESSURE:	0.50 – 10.0 Bar
OPERATING TEMPERATURE:	5°C - 80°C
SUPPLY:	Suitable for all plumbing systems

- Made from brass to preserve quality
- German Vernet cartridges for smooth operation
- Available in assorted finishes
- Solid brass lever

OPEN OUTLET FLOW (Bar – l/min)

15 Year Guarantee

Bar	1.0	1.5	2.0	2.5	3.0	3.5	4	5	
Head Flow	17.5	19.3	21.6	22.8	24.5	26	27.4	32	Please Note: Flow rate will be dictated by installation configurations. Please ensure to check the appropriate flow restrictor information if applicable. Please refer to the website for full warranty details.
Handheld	14.1	17.2	19.9	--	24.4	--	28.1	31.50	

CERTIFICATION:

- WRAS APPROVED: 1909394
- UPC
- CE
- WATERMARK

FURTHER DETAILS & DIMENSIONS CAN BE FOUND AT WWW.LUSSOSTONE.COM IN THE FEATURES SECTION AND DOWNLOADS TAB OF EACH PRODUCT PAGE.

TEL: 0203 370 4057

EMAIL: INFO@LUSSOSTONE.COM

WWW.LUSSOSTONE.COM

THE INFORMATION ON THIS DOCUMENT WAS CORRECT AT THE DATE OF ISSUE. SOME VARIATION MAY OCCUR DUE TO MANUFACTURING TOLERANCES AND SITE-SPECIFIC CONDITIONS.